

HabasitLINK®

Sprocket series M2500



M = Modular belts

Belt pitch

S = sprocket one-piece; Z = split sprocket

Number of teeth

Shaft size

Shaft type: Q = square shaft; R = round shaft

Material: 6 = POM; 8 = PA

M 25 S 12 40 Q 6

Sprocket availability

Type	Number of teeth	Diam. of pitch $\varnothing d_p$, A_1				Hub width B_L		Square bore Q		Ø Round bore R		Standard material
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	
S	7	59.4	2.3	24.7	0.97	20	0.79	25	1	-	-	POM
S	8	66.7	2.6	28.3	1.12	30	1.18	25	-	30	1	POM
S	10	82.5	3.3	36.3	1.43	30	1.18	40	1 / 1.5	30	1	POM
S	12	98.6	3.9	44.3	1.74	30	1.18	40	1 / 1.5	30 / 40	1	POM
S	15	122.7	4.8	56.4	2.22	30	1.18	60	-	-	-	POM
S	16	130.8	5.2	60.4	2.38	30	1.18	40	1.5	30	-	POM
S	18	146.9	5.8	68.4	2.69	30	1.18	40 / 60	1.5	30	1 / 1 1/4	POM
S	20	163.0	6.4	76.5	3.01	30	1.18	40 / 60	1.5	30	1	POM
Z	12	98.6	3.9	44.3	1.74	40	1.57	40	1.5	-	-	POM
Z	18	146.9	5.8	68.4	2.69	47	1.85	40	-	-	-	POM
Z	20	163.0	6.4	76.5	3.01	40	1.57	40	-	-	-	POM


S, Z: molded sprockets. Other sprocket and hub sizes on request.

Key ways for round bore shape follow European standards for metric sizes and US standards for imperial sizes. For detailed dimensions see table in the Engineering Guide chapter Design Guide.

Other materials available on request.




Sprocket one-piece ("open window")

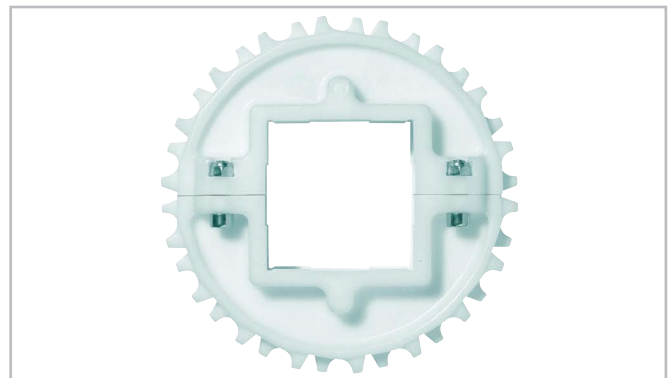


Split sprocket

Sprocket arrangement

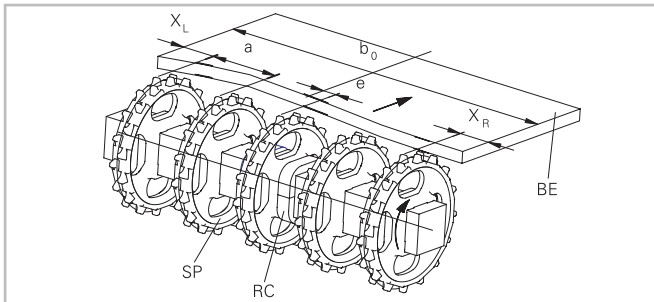

BE Belt
RC Retainer
SP Sprocket
b₀ belt width

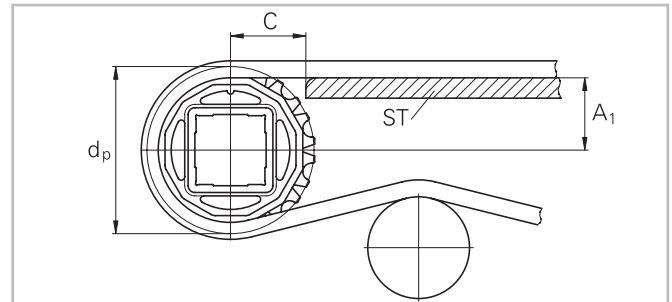

The distance **C** between the sprocket axis and the slider support **ST** is minimal 28 mm (1.1").

Wearstrips


Between driving shaft and idling sprockets or rollers the belt is carried by a slider support furnished with longitudinal wearstrips (ST) from UHMW Polyethylene or other suitable material.

Sprocket positioning


For correct positioning of the center sprocket divide the belt width by the link increment. The rounded result will be even or an odd number. These numbers are the criteria for offset or no offset, see table:

Belt type	Sprocket spacing a		Sprocket edge distance (minimal) *		Criteria for center sprocket position	Result of formula (rounded)	Offset e	Remarks
	minimal	maximal	X_L	X_R				
	mm inch	mm inch	mm inch	mm inch				
Series M2500 except M2540/44 except M2585/86	50 2	100 4	25 1	25 1	$b_o / 16.66$ $b_o / 0.66$	even number (2, 4, 6 ...)	8.3 0.33	right or left side
						odd number (3, 5, 7 ...)	0 0	no offset
M2540	50 2	117 4.6	21 0.8	29 1.15	$b_o / 16.66$ $b_o / 0.66$	even number (2, 4, 6 ...)	4.2 0.17	right in running direction A left in running direction B
						odd number (3, 5, 7 ...)	4.2 0.17	left in running direction A right in running direction B
M2540 with hold down tabs	50 2	117 4.6	54 2.13	62 2.44	$b_o / 16.66$ $b_o / 0.66$	even number (2, 4, 6 ...)	4.2 0.17	right in running direction A left in running direction B
						odd number (3, 5, 7 ...)	4.2 0.17	left in running direction A right in running direction B
M2540 MTW mold to width and bricklaid	50 2	117 4.6	41 1.6	49 1.93	$b_o / 16.66$ $b_o / 0.66$	even number (2, 4, 6 ...)	4.2 0.17	right in running direction A left in running direction B
						odd number (3, 5, 7 ...)	4.2 0.17	left in running direction A right in running direction B
M2544	50 2	117 4.6	33 1.3	42 1.65	$b_o / 16.66$ $b_o / 0.66$	even number (2, 4, 6 ...)	4.2 0.17	right in running direction A left in running direction B
						odd number (3, 5, 7 ...)	4.2 0.17	left in running direction A right in running direction B
M2585-P0 M2586	67 2.66	135 5.3	42 1.65	59 2.32	$b_o / 33.8$ $b_o / 1.33$	even number (2, 4, 6 ...)	8.3 0.33	right in running direction A left in running direction B
						odd number (3, 5, 7 ...)	8.3 0.33	left in running direction A right in running direction B
M2585-S0	67 2.66	135 5.3	76 3	59 2.32	$b_o / 33.8$ $b_o / 1.33$	even number (2, 4, 6 ...)	8.3 0.33	right in running direction A left in running direction B
						odd number (3, 5, 7 ...)	8.3 0.33	left in running direction A right in running direction B

* X_L and X_R are related to the running direction A and inverse for running direction B.

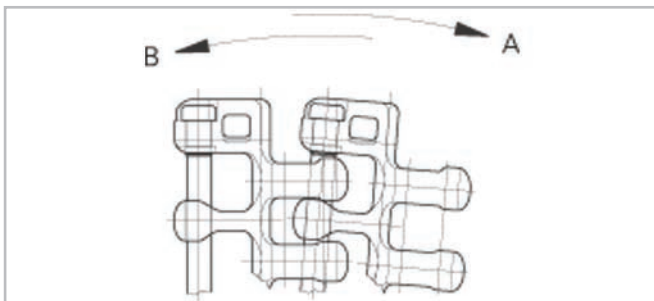

M2540, left edge X_L (M2544 similar)

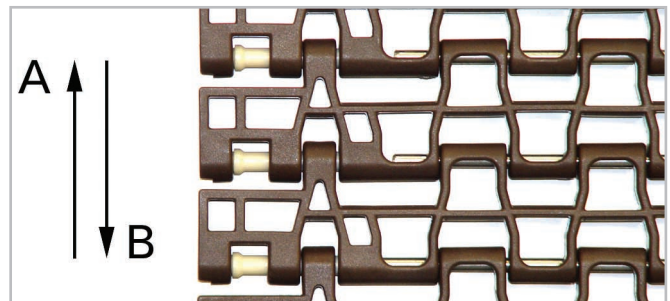

M2585-S0, left edge X_L (M2585-P0, M2586 similar)

Number of sprockets and wearstrips for straight running belts

(excluding M2585 / 86: see separate table)

Standard belt width (nominal)		Number of sprockets per shaft min. number	Number of wearstrips	
mm	<i>inch</i>		Carryway (top)	Returnway (bottom)
150	6	2	2	2
200	8	2	2	2
250	10	3	3	2
300	12	3	3	2
350	14	3	4	3
400	16	3	4	3
450	18	5	4	3
500	20	5	5	3
550	22	5	5	3
600	24	5	5	3
700	28	7	6	4
800	32	7	7	4
900	36	9	7	4
1000	40	9	8	5
1100	43	11	8	5
1200	47	11	9	5
1300	51	13	10	6
1400	55	13	10	6
1600	63	15	11	6
1800	71	17	12	7
2000	79	19	13	7

The number of sprockets depends on the belt load and may be different for driving and idling shafts.
For calculation of correct sprocket number please use LINK-SeleCalc.

Number of sprockets and wearstrips for radius belts M2540, M2544

Standard belt width (nominal)		Number of sprockets per shaft	Number of wearstrips	
mm	<i>inch</i>	min. number	Carryway (top)	Returnway (bottom)
150	6	2	2	2
200	8	2	2	2
250	10	2	3	2
300	12	3	3	2
350	14	3	3	3
400	16	3	3	3
450	18	3	3	3
500	20	3	4	3
550	22	5	4	3
600	24	5	4	3
700	28	5	5	4
800	32	7	5	4
900	36	7	5	4
1000	40	9	6	5
1100	43	9	6	5
1200	47	9	7	5

The number of sprockets depends on the belt load and may be different for driving and idling shafts. For calculation of correct sprocket number please use LINK-SeleCalc.

Number of sprockets and wearstrips for radius belts M2540 and M2544 with hold down tabs

Standard belt width (nominal)		Number of sprockets per shaft	Number of wearstrips	
mm	<i>inch</i>	min. number	Carryway (top)	Returnway (bottom)
150	6	1	2	2
200	8	2	2	2
250	10	2	3	2
300	12	2	3	2
350	14	3	3	3
400	16	3	3	3
450	18	3	3	3
500	20	3	4	3
550	22	3	4	3
600	24	5	4	3
700	28	5	5	4
800	32	5	5	4
900	36	7	5	4
1000	40	9	6	5
1100	43	9	6	5
1200	47	9	7	5

The number of sprockets depends on the belt load and may be different for driving and idling shafts. For calculation of correct sprocket number please use LINK-SeleCalc.

Number of sprockets and wearstrips for radius belts M2540 Radius Flush Grid 1" MTW (mold to width and bricklaid)

Standard belt width (nominal)		Number of sprockets per shaft	Number of wearstrips	
mm	inch	min. number	Carryway (top)	Returnway (bottom)
206	8.11	2	2	2
256	10.08	2	3	2
306*	12.05	3	3	2
406	16	3	3	3
506	19.9	5	4	3
606	23.85	5	4	3

* The belt width 306 mm (12.05") is a non-cut standard mold to width belt. All other belt widths are cut sizes.

Number of sprockets and wearstrips for M2585, M2586

Standard belt width (nominal)		Number of sprockets per shaft	Number of wearstrips	
mm	inch	min. number	Carryway (top)	Returnway (bottom)
305	12	2	2	2
508	20	3	3	2
711	28	5	4	2
914	36	7	6	3
1117	44	7	8	3
1319	52	9	10	4
1522	60	11	10	4
1725	68	13	12	7
1928	76	13	12	7
2131	84	15	13	8
2333	92	17	16	8
2536	100	19	18	9

The number of sprockets depends on the belt load and may be different for driving and idling shafts. For calculation of correct sprocket number please use LINK-SeleCalc.

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.